




# **MANTIS® 3612**18 TON TELE-BOOM CRAWLER CRANE

#### 70 FT MAIN BOOM, 16 FT TO 25 FT EXTENDABLE JIB



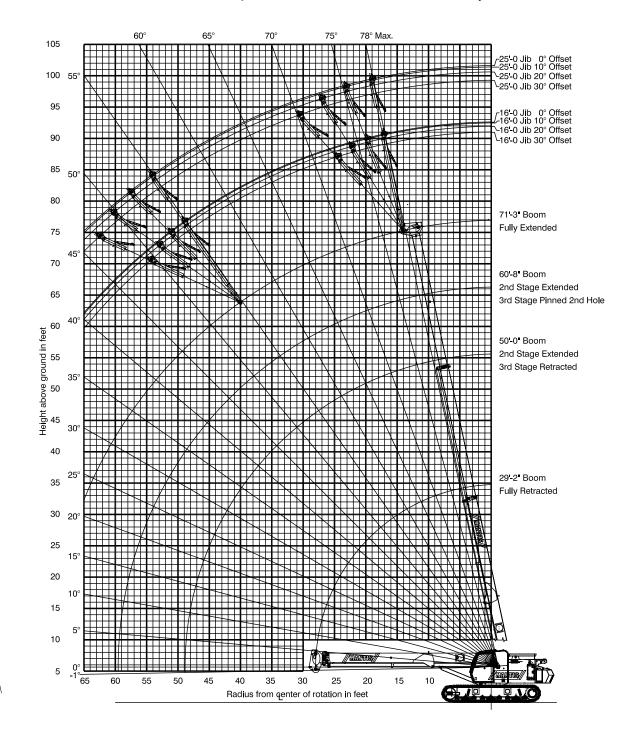








## **MANTIS**<sup>®</sup> **3612** 18 TON TELE-BOOM CRAWLER CRANE

### 70 FT MAIN BOOM, 15 FT JIB

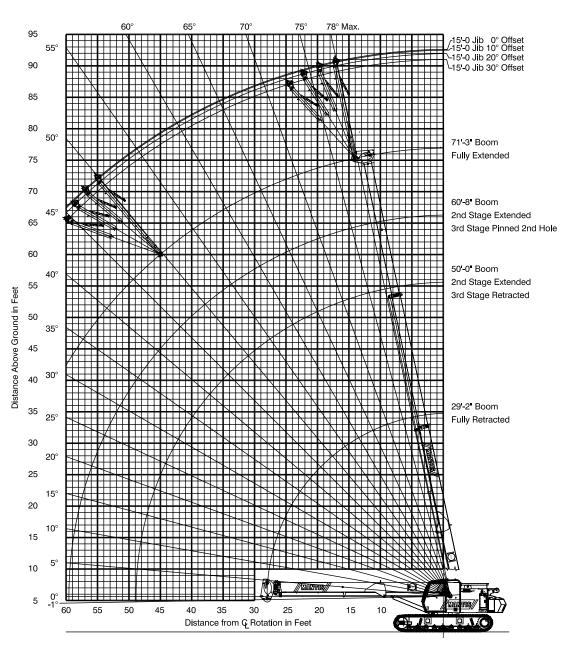



### **MANTIS**<sup>®</sup> **3612** 18 TON TELE-BOOM CRAWLER CRANE

#### LIFTING CAPACITIES

IN THOUSANDS OF POUNDS; 360°, 75% OF TIPPING, FIRM & LEVEL GROUND

	MAIN BOOM with TRACKS FULLY EXTENDED										
	10,0	00 lb C	OUNT	ERWEI	GHT	ZE	RO CO	UNTE	RWEIG	HT	
	MAIN BOOM LENGTH (ft)						MAIN BOOM LENGTH (ft)				
	29.2	39.6	50.0	60.6	71.3	29.2	39.6	50.0	60.6	71.3	
10	36.0 68.3°	36.0* 74.2°				36.0 68.3°	36.0* 74.2°				10
12	36.0 64.0°	36.0 71.2°	36.0 75.2°	36.0* 77.9°		29.0 64.0°	29.0 71.2°	29.0 75.2°	29.0* 77.9°		12
15	24.8 57.2°	24.8 66.5°	24.8 71.6°	24.8 74.9°	24.8* 77.2°	19.2 57.2°	19.2 66.5°	19.2 71.6°	19.2 74.9°	19.2* 77.2°	15
20	16.4 44.3°	16.4 58.3°	16.4 65.4°	16.4 70.0°	16.4 73.1°	12.2 44.3°	12.2 58.3°	12.2 65.4°	12.2 70.0°	12.2 73.1°	20
25	11.5 27.1°	11.5 49.2°	11.5 58.9°	11.5 64.8°	11.5 68.8°	8.1 27.1°	8.1 49.2°	8.1 58.9°	8.1 64.8°	8.1 68.8°	25
30		8.4 38.7°	8.4 51.9°	8.4 59.5°	8.4 64.4°		5.6 38.7°	5.6 51.9°	5.6 59.5°	5.6 64.4°	30
35		6.5 24.7°	6.5 44.2°	6.5 53.8°	6.5 59.9°		4.1 24.7°	4.1 44.2°	4.1 53.8°	4.1 59.9°	35
40			5.1 35.1°	5.1 47.7°	5.1 55.1°			3.0 35.1°	3.0 47.7°	3.0 55.1°	40
45			4.0 23.1°	4.0 40.8°	4.0 50.0°			NR	NR	NR	45
50				3.3 32.9°	3.3 44.5°				NR	NR	50
55				2.7 22.6°	2.7 38.4°				NR	NR	55
60					2.3 31.3°					NR	60

<sup>\*</sup> Capacity based on maximum obtainable boom angle.

<sup>°</sup> Boom angles are stated in degrees.

Weight Reductions Load Handling Devices	
Hookblock: 18 Ton - 2 Sheave	500 lbs
Overhaul Ball: 7 Ton w/Swivel	162 lbs
Optional Load Handling Devices	
15 ft. A-Frame Jib - Stowed**	170 lbs
15 ft. A-Frame Jib - Erected**	550 lbs
16 ft 25ft. Extenable Jib - Stowed**	350 lbs
16 ft 25ft. Extenable Jib - Erected**	1,250 lbs
Auxillary Nose Sheave**	145 lbs
Auger Ready Package**	250 lbs
Auger Package Complete - Stowed**	800 lbs
Auger Package Complete - Erected**	1,500 lbs

<sup>\*\*</sup> Reduction of main boom capacities.

MAIN BOOM with TRACKS FULLY RETRACTED  10,000 lb COUNTERWEIGHT										
DADILIC			BOOM LENG			DADILIC				
RADIUS (ft)	29.2	39.6 50.0		60.6	71.3	RADIUS (ft)				
10	36.0 68.3°	36.0 74.2°				10				
12	36.0 64.0°	36.0 71.2°	36.0 75.2°	36.0 77.9°		12				
14	19.5 59.5°	19.5 68.1°	19.5 72.8°	19.5 75.9°		14				
16	13.8 54.8°	13.8 64.9°	13.8 70.4°	13.8 74.0°	13.8 76.4°	16				
18	11.4 22.3°	11.4 47.3°	11.4 57.6°	11.4 63.8°	11.4 67.9°	18				
20	9.6 44.3°	9.6 58.3°	9.6 65.4°	9.6 70.0°	9.6 73.1°	20				
22	8.3 38.3°	8.3 54.8°	8.3 62.9°	8.3 67.9°	8.3 71.4°	22				
24	7.1 31.3°	7.1 51.1°	7.1 60.3°	7.1 65.9°	7.1 69.7°	24				
26	6.2 22.3°	6.2 47.3°	6.2 57.6°	6.2 63.8°	6.2 67.9°	26				
28	5.4 3.9°	5.4 43.2°	5.4 54.8°	5.4 61.7°	5.4 66.2°	28				
30		4.8 38.7°	4.8 51.9°	4.8 59.5°	4.8 64.4°	30				
32		4.1 33.7°	4.1 48.9°	4.1 57.2°	4.1 62.6°	32				
34		3.6 28.0°	3.6 45.8°	3.6 55.0°	3.6 60.8°	34				
36		3.1 20.8°	3.1 42.5°	3.1 52.6°	3.1 58.9°	36				
38		2.7 9.3°	2.7 38.9°	2.7 50.2°	2.7 57.0°	38				
40			2.4 35.1°	2.4 47.7°	2.4 55.1°	40				
42			2.0 30.8°	2.0 45.0°	2.0 53.1°	42				

ZERO DEGREE BOOM ANGLE							
	MAXIMUM	CAPACITY					
with	TRACKS FU	LLY EXTEND	ED				
10	,000 lb COU	NTERWEIGH	Г				
BOOM RADIUS LOAD (Ib) BOOM LENGTH (ft) (ft) (x 1000)							
LENGIH (II)	(π)	(x 1000)					
29.2	28.1	9.3					
	` ′	, ,	(ft)				
29.2	28.1	9.3	(ft) 29.2				





### **MANTIS**<sup>®</sup> **3612** 18 TON TELE-BOOM CRAWLER CRANE

#### LIFTING CAPACITIES

IN THOUSANDS OF POUNDS; 360°, 75% OF TIPPING, FIRM & LEVEL GROUND

AUXILIARY NOSE SHEAVE with TRACKS FULLY EXTENDED										
10,000 lb COUNTERWEIGHT										
RADIUS		MAIN BO	OM LEN	IGTH (ft)		RADIUS				
(ft)	29.2	39.6	50.0	60.6	71.3	(ft)				
10	9.0	9.0				10				
	68.3°	74.2°	0.0	0.0						
12	9.0 64.0°	9.0 71.2°	9.0 75.2°	9.0 77.9°		12				
	9.0	9.0	9.0	9.0	9.0					
15	57.2°	66.5°	71.6°	74.9°	77.2°	15				
20	9.0	9.0	9.0	9.0	9.0	20				
20	44.3°	58.3°	65.4°	70.0°	73.1°	20				
25	9.0	9.0	9.0	9.0	9.0	25				
25	27.1°	49.2°	58.9°	64.8°	68.8°	25				
30		8.4	8.4	8.4	8.4	30				
		38.7°	51.9°	59.5°	64.4°					
35		6.5	6.5	6.5	6.5	35				
		24.7°	44.2°	53.8°	59.9°					
40			5.1 35.1°	5.1 47.7°	5.1 55.1°	40				
			4.0	47.7	4.0					
45			23.1°	4.0 40.8°	50.0°	45				
			20.1	3.3	3.3					
50				32.9°	44.5°	50				
55				2.7	2.7	55				
55				22.6°	38.4°	55				
60					2.3	60				
00					31.3°	00				

15' A-FRAME JIB TRACKS FULLY EXTENDED 10,000 Ib COUNTERWEIGHT									
Boom	3	Boom Angle							
Angle	0°								
75°	5.0	2.5	2.5	2.5	75°				
70°	4.6	2.3	2.3	2.3	70°				
65°	4.1	2.1	2.1	2.1	65°				
60°	3.7	3.7 1.8 1.8 1.8							
55°	3.2	1.6	1.6	1.6	55°				
50°	2.8	1.4	1.4	1.4	50°				
45°	2.3	1.2	1.2	1.2	45°				
40°	1.9	1.0	1.0	1.0	40°				


	16' to 25' EXTENDABLE JIB TRACKS FULLY EXTENDED 10,000 lb COUNTERWEIGHT										
16' 25' Boom Jib Offset Angles Jib Offset Angles										Boom	
Angle	0°	10°	20°	30°							
75°	6.6	2.2	2.2	2.2		4.1	1.3	1.3	1.3	75°	
70°	4.9	2.0	2.0	2.0		3.1	1.2	1.2	1.2	70°	
65°	3.9	1.8	1.8	1.8		2.4	1.1	1.1	1.1	65°	
60°	3.3	1.7	1.7	1.7		2.0	1.0	1.0	1.0	60°	
55°	2.8	1.6	1.6	1.6		1.7	1.0	1.0	1.0	55°	
50°	<b>50°</b> 2.5 1.5 1.5 1.5 1.5 0.9 0.9 0.9										
45°	2.2	1.5	1.5	1.5		1.3	0.9	0.9	0.9	45°	

<sup>°</sup> Boom angles are stated in degrees.



### **MANTIS**<sup>®</sup> **3612** 18 TON TELE-BOOM CRAWLER CRANE

#### **MANTIS WP-750 WORK PLATFORM**

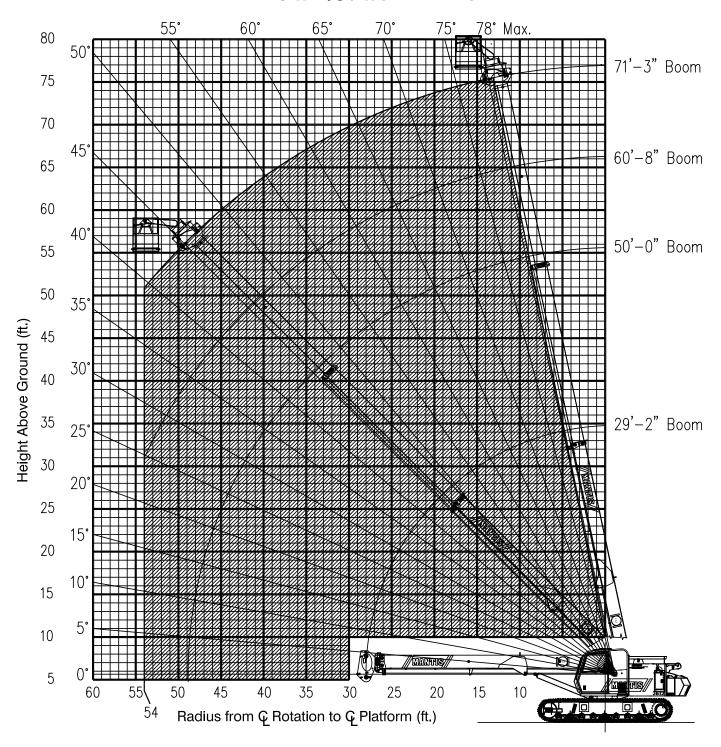


Limits of operation: Maximum load capacity = 750 lb Maximum radius when mounted on main boom = 54 ft





# MANTIS<sup>®</sup> 3612 18 TON TELE-BOOM CRAWLER CRANE

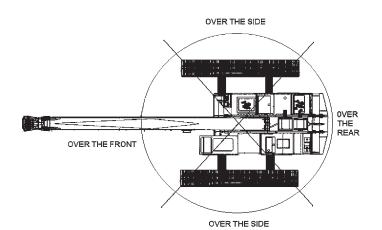

MANTIS MODEL 3612										
WIRE ROPE LINE PULL CAPACITIES										
PARTS OF LINE	MAIN WINCH (pounds)	AUX WINCH (pounds)	PARTS OF LINE	MAIN WINCH (pounds)						
1	9,600	9,600	4	38,400						
2	19,200	N/A	5	48,000						
3 28,800 N/A										
9/1	9/16 inch diameter wire rope, 6 x 37 Class, EIP, IWRC									

PLEASE READ, UNDERSTAND, AND FOLLOW THE MANUALS FURNISHED WITH THE CRANE (OPERATOR'S AND SAFETY)
AS WELL AS THE CAPACITY LIMITATIONS AND GENERAL CONDITIONS LISTED BELOW PRIOR TO OPERATION OF THE CRANE.
FAILURE TO DO SO MAY RESULT IN AN ACCIDENT.

#### **Capacity Limitations and General Conditions:**

- This MANTIS CRANE as manufactured, meets the requirements of ANSI B30.5 (2000). Structure and stability have been tested in accordance with SAE J1063 and SAE J765, respectively. Modifications to the crane or use of optional equipment other than specified by the manufacturer can result in a reduction of capacity.
- The main boom and auxliary boom head lifting capacities are determined by boom length and load radius. The extension and jib lifting capacities are determined by boom angle.
- 3. Rated capacity loads given are maximum covered by the manufacturer's warranty and are based on a freely suspended load with NO allowance for factors such as out-of-level operation, supporting surface conditions, hazardous surroundings, experience of personnel, etc. The operator shall establish practical working loads based on prevailing operating conditions, such as, but not limited to the above.
- All rated capacity loads shown apply to original equipment as supplied by SpanDeck, Inc.
- All rated capacity loads appearing above the bold line are based on structural strength; tipping should not be relied upon as a capacity limitation.
- 6. All rated capacity loads appearing below the bold line are based on stability and do not exceed 75% of tipping.

- Deductions from rated capacities must be made for the weight of the hook block, headache ball, slings, spreader bar, and any other suspended equipment. See Lifting Capacity Deduction Chart for load handling devices supplied by SpanDeck, Inc.
- 8. A properly calibrated and maintained Load Moment Indicator (LMI) system will indicate boom mounted and other suspended equipment.
- When making lifts where capacities may be within a zone limited by structural strength, the operator shall determine that the weight of the load is known within plus or minus (+/-) ten percent (10%) before making lift.
- 10. It is permissible to attempt to telescope boom with a load within the limits of rated capacities. However, boom telescope system hydraulic pressure, and/or boom lubrication may affect operation.
- 11. Side pull on boom is extremely dangerous and must be avoided.
- 12. **DO NOT** exceed manufacturers maximum specified reeving.
- DO NOT lift load or extend boom without proper configuration of crane per load chart selected.
- 14. **DO NOT** attempt to lift any load when wind speed exceeds 20 mph.

Load moment indicating and anti-two block systems are operator aids and must never be used in lieu of job site lift planning calculations by the operator which must take into account ground conditions, weather and all other environmental factors prevailing at the time of the lift. Prices and specifications are subject to change at any time without prior notice and are for factory installation at the time of original manufacture. F.O.B Plant; Richlands, VA 24641. Illustrations and photographs may show optional equipment. Supercedes all previous issues. Please see www.mantiscranes.com for most current information.