























MINI-DERRICK SUPER 6000 LOW PRO TECHNICAL SPECIFICATIONS

BASE DRIVE TRACKS

TRACK ALARMS

ENGINE PUMP

HYDRAULIC TANK

MAX OPERATING PRESSURE

BOOM ASSEMBLY

INSULATION WORK ZONE STABILIZERS

OUTRIGGER SAFETY

ROTATION
CONTROLS
SHEAVE HEIGHT
AUGER DRIVE
CAPACITY
WINCH

MATERIAL HANDLING AUXILIARY POWER POLE CARRIERS WORK LIGHTS High Strength Steel Construction 2 Speed Planetary Reduction

Hydraulic Extension, Rubber Construction Audible Alarms on Tracks / Extend - Retract

32 H.P. Turbo Diesel 15 G.P.M. Gear Design

21 Gallon 2900 PSI

3 Section All Hydraulic Extension 46 KV Category C / Fiberglass Boom

Non Restricted

Outriggers / Hybrid Design - Radial Type

Outrigger Safety Interlocks

440 Degree / High Strength Bearing

Full Pressure / Radio Remote

40 FT. / 48 FT.

5800 LB.-FT with 18" Diameter Auger


6000 LBS.

Planetary / Plasma Rope

Integrated Bed 3000 LB. Capacity Hydraulic Tool Circuit at Ground

Dual Sided Set of (2) Two



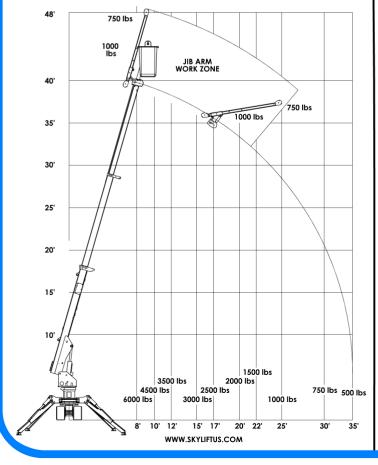

OPTIONAL EQUIPMENT

- CAN HANDLER JIB / WINCH
- HYDRAULIC HOSE REEL FOR TOOLS
- ELECTRIC RECOVERY WINCH
- HYDRAULIC OVERLOAD PROTECTION
- CONTINUOUS ROTATION
- BELTPACK RADIO REMOTE FOR BOTH DRIVE AND BOOM CONTROLS W/ START & STOP
- STOP HYDRAULIC POLE GUIDES
- HYDRAULIC JIB / 8 FT ADDITIONAL BOOM
- BOOM OVERSTOW SWITCH
- SINGLE MAN BUCKET WITH REVERSABLE HANGER. 350 LB. CAPACITY W/ LINER
- TWO SINGLE MAN BASKETS WITH DUAL BUCKET HANGER.
- TRAILER / 18,000 LB GVWR TANDEM AXEL
 W/ ELECTRIC OR AIR BRAKES

Call for Special Requests!



3000 Leavitt Rd. Lorain, Ohio 44052 Ph.440-960-2100 Fax 440-960-2104