

Self Diesel operated Mobile Crane Max. Capacity Lbs. 16,500





Valla	
OUTREACH (Ft)	CAPACITY (Lbs.)
6	8,400
9	5,200
15	2,400





TECHNICAL DATA

CRANE FRAME: six-wheelers frame fabricated from preformed and welded steel plate with built-in counterweight.

DRIVE: by 4 cylinders, 38 kW water cooled turbo diesel engine.

BRAKES: hydraulically controlled foot operating brake. Lever mechanically controlled parking brake.

SUSPENSION: oscillating rear axle with mechanical lock.

STEERING: power steering with hydraulic cylinder and 140 $^{\circ}$ articulation. Safety valves and filter.

WHEELS: nr. 2 rear superelastic 6.50 R10 and nr. 4 front superelastic 21 x 8 R9.

BOOM: boom fabricated from preformed and welded quality steel plate. Nr.4 telescoping sections: 1 fixed; 3 hydraulically telescoping. Fitted with nylon wear pads adjustable wear pads on the sides.

HYDRAULIC SYSTEM: in own enclosed circuit powered by a gear pump through proportional distributor controlled by joystick. Fitted with safety valves and filters on all boom operations. Maximum hydraulic pressure 200 Bar.

LMI: electronic Load Moment Indicator. Display showing lifted load, max allowed load, tilting percentage, operative radius, angle, telescope and light indicators on the operative mode.

TOTAL WEIGHT: approx. Lbs. 15,000


MAX. CAPACITY: Lbs. 16,500

Options on request: hydraulic winch; chain hoists; carry-deck; manual and hydraulic jibs; cable remote control; radio remote control; man bucket and relevant certification as aerial platform; full set of road lights; non marking tires.





VALLA mobile crane mod. 75D complies with the following standards: -2006/42/CE -UNIEN13000 -LS.P.E.S.L.

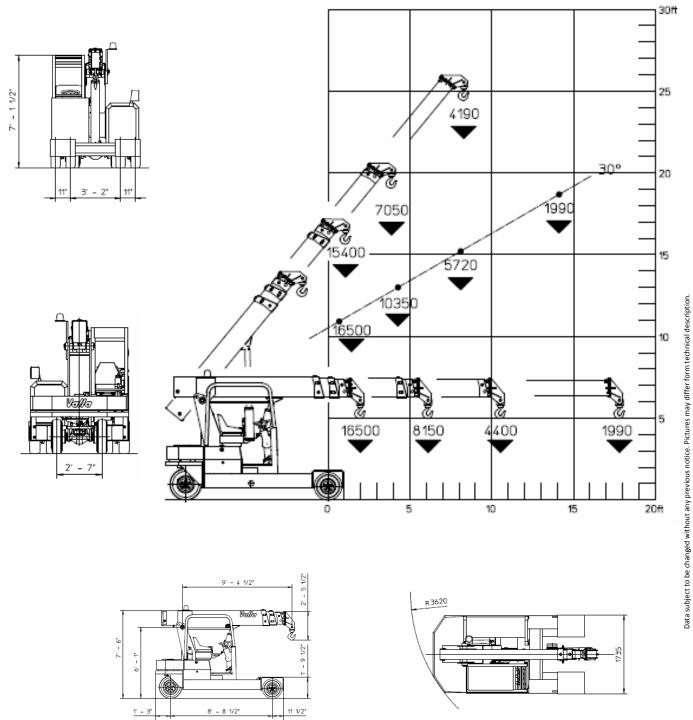

VALLA SINCE 1945 LEADER IN PICK & CARRY

Valla a division of CVS Ferrari Srl Via Piacenza, 45 - 29010 Calendasco (Piacenza) - ITALIA Tel. +39 0523 762025 / 752004 - Fax +39 0523 760531 e-mail: info@valla.com - www.valla.com

Lbs./ft

10' - 11"