











FS121/FS138 FALCON

#### The FALCON Series

When you need considerable work height combined with limited or narrow access and maybe even surface pressure restrictions, nothing outperforms the new FALCON series. In a field dominated by traditional boom lifts, the FALCON series sets a new standard for compact, flexible and light aerial work platform design. The new design is not only elegant, but also makes it the most user-friendly and safe unit in its class.

- Available in 9 models from 85ft 138ft
- Most models available in wheel or track version
- · Pass through a single or double door opening
- First and only compact lift with a double jib system
- Automatic outrigger setting (optional)
- Drive from basket (optional in wheel based lifts)
- · Automatic, double safety and stability system
- Multi position outrigger system
- Set up on uneven surfaces
- · Lightweight, detachable basket
- Self loads onto low bed trailer
- Customized trailer available upon request


We reserve the right to alterations

Model	FS121	FS138
Working height Basket height Max outreach	121ft 115ft 53ft	138ft 132ft 54ft
Jib arm (2x10ft) Double jib arm Basket load Basket dims Basket rotation (opt) Turret rotation	20ft 200° 440lbs 4'7" x 2'7" +/-90° 375°	20ft 200° 440lbs 4'7" x 2'7" +/-90° 375°
Height Length Width Gradability (standard) Footprint (adjustable) Weight (approx) Max pressure, tires Max pressure, footplate	6ft6in 26ft7in 2ft11in 5°/10% 18ft4in 15,840lbs 84psi 39psi	6ft6in 27ft0in 2ft11in 5°/10% 18ft4in 17,600lbs 97psi 43psi
8 battery pack 24V DC motor Lombardini diesel engine Honda generator	Standard Standard Option Option	Standard Standard Option Option






## FS121

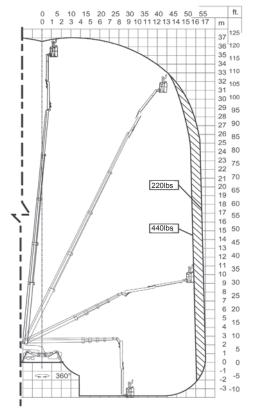

#### FS138

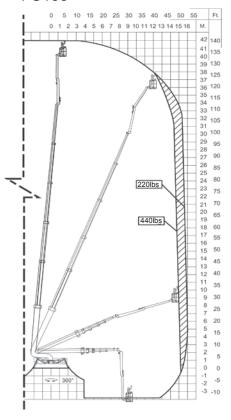





FS121/FS138 FALCON

### Standard Equipment

Automatic stability & outreach control Computer controlled (can-bus) Proportional control of all functions Self propelled Battery powered with charger Double jib arm 375° non cont. turret rotation Individual setting of outriggers Elec. checking of the power system Manual pump for emergency lowering Self-load onto trucks and trailers Adjustable wheel axle Min. width of only 2ft11in 2 person basket Space for tools etc in basket Storage room in chassis with lock Dual axle (reduces ground pressure) 4 wheel drive Portable control panel for the chassis

# **Optional Equipment**

180° (+/-90°) basket rotation 110V AC power to the basket Air/water to the basket Distance sensor on the basket Wind sensor on the basket Lombardini diesel engine Honda gasoline generator Extra batteries Autosetting/leveling from basket Chassis control from the basket Sliding boxes for outriggers Special color Height control switch Extra narrow outrigger setting (8ft5in) Baskets in various sizes Slope alarm Main boom raised max 6ft while driving







ReachMaster, Inc.
1416 D Stonehollow Dr.
Kingwood, TX 77339
TF: 1-866-358-7088
Tel: 281-358-7088
Fax: 281-359-3500
www.reachmaster.com