


PK 22002-EH

High Performance

PALFINGER CRANE



KTL
protected

**Paltronic
50**
controlled

RRC
Radio Remote Control
operated

ISC
Integrated Stability Control
monitored



AOS
Active Oscillation Suppression
inside

The ideal crane for cost-efficient mounting on tipper trucks

This truck-mounted crane combines functionality, comfort and safety in time-tested PALFINGER technology. Its design has function. Its motion geometry expands the horizon of possible uses. Equipped with a double telescope stabilizer system, it is ideally suited to mounting on tipper trucks.

Low dead weight
and large
stabilizer width

PK 22002 EH High Performance

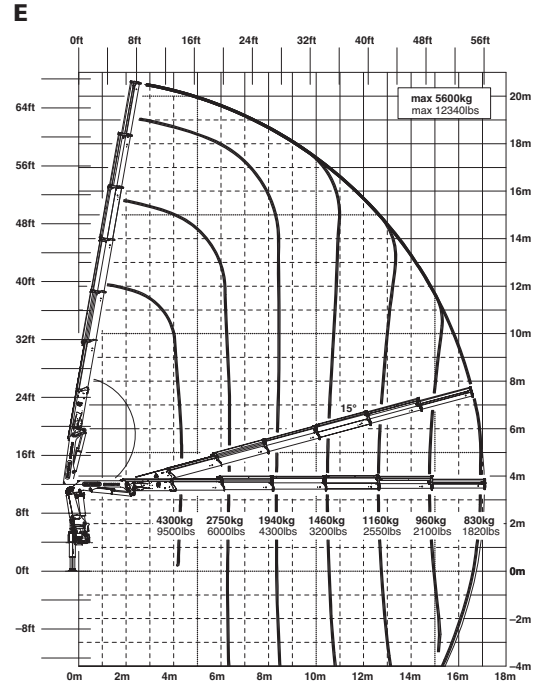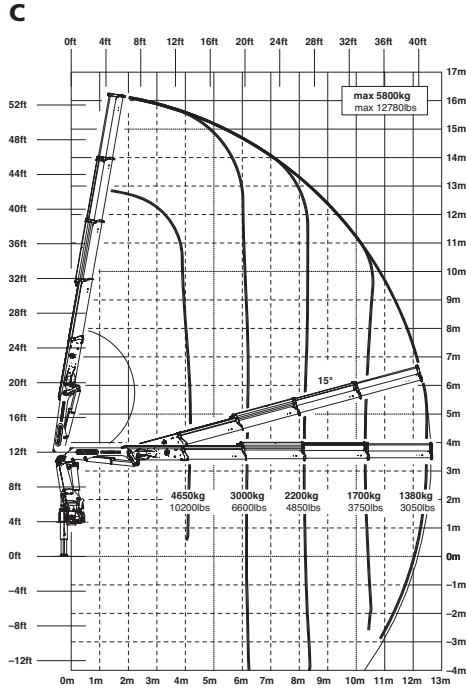

Technical Specifications (EN 12999 HC1 HD4/B3)

Max. lifting moment	20.9 mt/205.0 kNm	151190 ft.lbs
Max. lifting capacity	6100 kg/59.8 kN	13440 lbs
Max. hydraulic outreach	17.1 m	56' 1"
Max. manual outreach	19.1 m	62' 8"
Max. outreach (with fly jib)	25.2 m	82' 8"
Slewing angle	400°	

Slewing torque	2.3 mt/22.6 kNm	16640 ft.lbs
Stabilizer spread	std. 5.0 m/16' 5"	max. 7.4 m/24' 3"
Fitting space required (std.)	0.91 m	2' 12"
Width folded	2.52 m	8' 3"
Max. operating pressure	350 bar	5075 psi
Recommended pump capacity	from 65 l/min	17.2 US gal./min
	to 90 l/min	23.8 US gal./min
Dead weight (std.)	2391 kg	5270 lbs

