





Standard



Optional



1S

	3865	2470	1740	kg
	2.67	4.34	6.12	m
1330 kg 2930 lb	8520	5445	3835	lb
	8'9"	14'2"	20'	ft

2S

	3725	2340	1625	1225	kg
	2.67	4.41	6.19	8.09	m
1450 kg 3195 lb	8210	5155	3580	2700	lb
	8'9"	14'5"	20'3"	26'6"	ft

3S

	3635	2250	1525	1125	905	kg
	2.67	4.48	6.27	8.16	10.06	m
1545 kg 3405 lb	8010	4960	3360	2480	1995	lb
	8'9"	14'8"	20'6"	26'9"	33'	ft


4S

	3545	2165	1430	1040	810	670	kg
	2.67	4.55	6.34	8.23	10.13	12.03	m
1640 kg 3615 lb	7815	4770	3150	2290	1785	1475	lb
	8'9"	14'11"	20'9"	27'	33'2"	39'5"	ft

MODEL							
	txm	(°)	mm	mm	mm	mm	t
1S	10,73	400	2220	2455	805	4540 5500	12
2S	10,33	400	2220	2455	805	4540 5500	12
3S	10,09	400	2220	2455	805	4540 5500	12
4S	9,86	400	2220	2455	805	4540 5500	12


MODEL							
	lb*ft	(°)	in	in	in	in	lb
1S	77640	400	87	97	32	179 217	26500
2S	74740	400	87	97	32	179 217	26500
3S	73000	400	87	97	32	179 217	26500
4S	71340	400	87	97	32	179 217	26500

5S

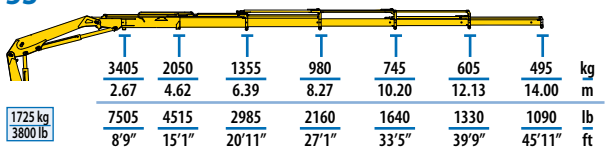


1725 kg
3800 lb


2S+JIB 2S

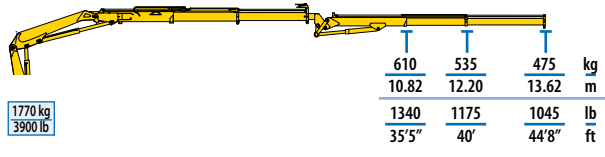


1770 kg
3900 lb




3S+JIB 2S

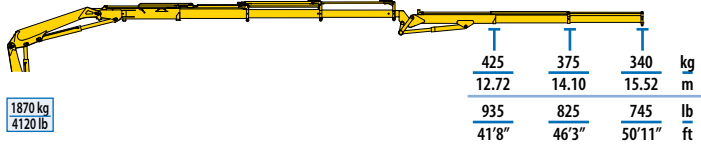


1870 kg
4120 lb




4S+JIB 2S

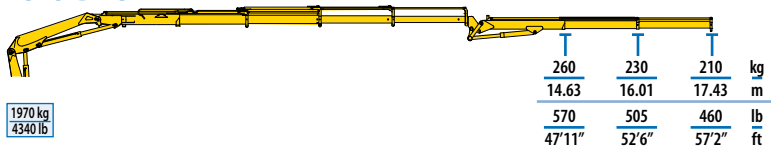


1970 kg
4340 lb



4S+JIB 3S

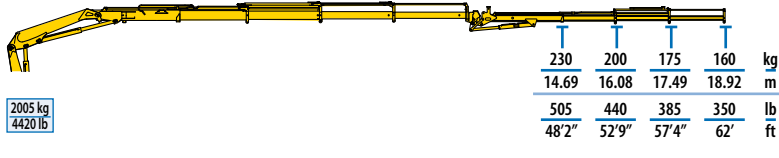

2005 kg
4420 lb

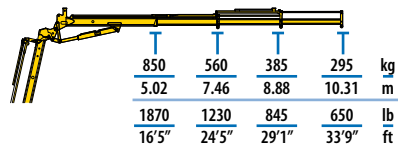

MODEL							
	txm	(°)	mm	mm	mm	mm	t
5S	9,48	400	2220	2455	890	4540 5500	12
2S+JIB 2S	10,33	400	2220	2455	875	4540 5500	12
3S+JIB 2S	10,09	400	2220	2455	875	4540 5500	12
4S+JIB 2S	9,86	400	2220	2455	875	4540 5500	12
4S+JIB 3S	9,86	400	2220	2455	875	4540 5500	12

MODEL							
	lb*ft	(°)	in	in	in	in	lb
5S	68590	400	87	97	35	179 217	26500
2S+JIB 2S	74740	400	87	97	34	179 217	26500
3S+JIB 2S	73000	400	87	97	34	179 217	26500
4S+JIB 2S	71340	400	87	97	34	179 217	26500
4S+JIB 3S	71340	400	87	97	34	179 217	26500