

MODEL 630cm

30 TON
CAPACITY
HYDRAULIC
CRANE

SPECIFICATIONS

SELF-PROPORTIONING HYDRAULIC BOOM—TO 84 FEET

20-FOOT STOWAWAY JIB—8,000 POUNDS CAPACITY
(OPTIONAL)

360° CONTINUOUS GLIDE ROTATION WITH
FAIL-SAFE BRAKE

SINGLE LINE PULL TO 10,300 POUNDS

HOIST SPEEDS TO 310 F.P.M.—POWER UP AND
POWER DOWN—FREE DROP (OPTIONAL)

DELUXE OPERATOR'S CAB—AIR CONDITIONING
(OPTIONAL)


OUTRIGGER CONTROL FROM CRANE CAB—
18-INCH STROKE—16-FOOT SPREAD

TWIN BOOM-LIFT CYLINDERS (0° TO 75°)

MULTI PUMP OPERATION—FAST SMOOTH CYCLING

REMOVABLE COUNTERWEIGHT

8 x 4 CARRIER

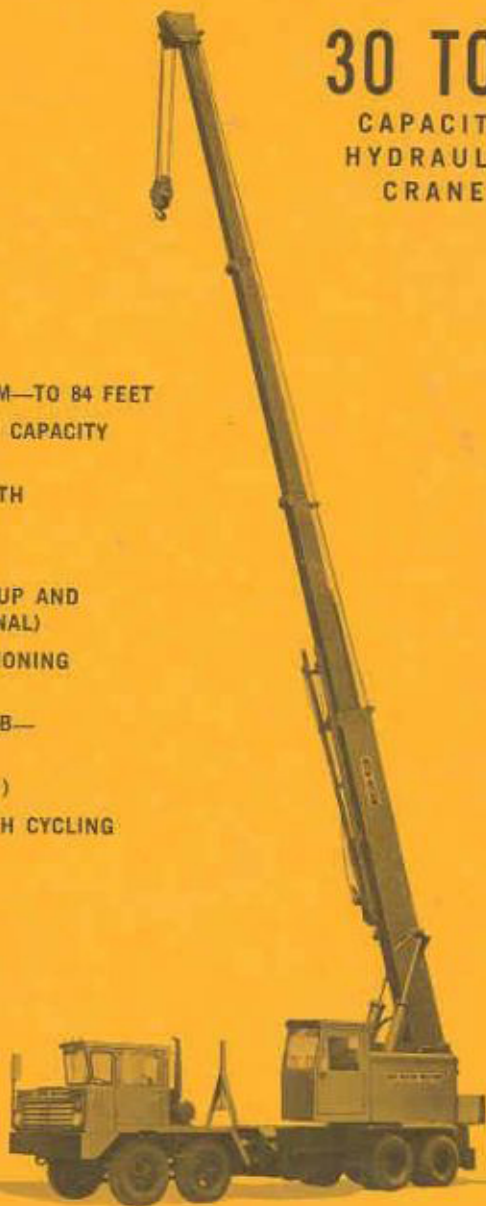

BLH AUSTIN-WESTERN

CONSTRUCTION & MATERIAL HANDLING EQUIPMENT
CRANES • GRADERS • ROLLERS • SWEEPERS