





VALLA 75 E MOBILE CRANE Max Capacity 7,5 t



DRIVE: DC 8 kW - 48 V fanned, reversible electric motor with MOSFET electronic control HF and energy saving, self diagnostic, speed and temperature checks (no. 2 thermostasts), brush wear warning.

TRANSMISSION: differential axle and reduction gear. Speed up to 10 km/h.

BATTERY: 48 V 575 Ah. Battery charge indicator on dashboard.

SUSPENSION: oscillating rear axle with mechanical lock.

BRAKES: foot hydraulically operated brakes (disc on front, shoes on rear wheels). Parking hand brake mechanically operated.

STEERING: power steering with hydraulic cylinder and 140° articulation (ORBITROL system). Safety valves and filter.

CRANE FRAME: fabricated from preformed and welded quality steel plate with built-in counterweight.

WHEELS: rear 2 tires 6.50 R10". Front 4 solid tires 21 x 8 -9".


BOOM: fabricated from preformed and welded quality steel plate with 3 hydraulic telescoping sections on nylon wear pads.

HYDRAULIC SYSTEM: 5 kW - 48 V electric pump, proportional distributor controlled by joystick, filter, safety valves on all boom operations. Max pressure 190 Bar.

DRIVER'S OVERHEAD GUARD: steel frame with metal checker plate and full visibility.

WEIGHT: 6.100 Kg.

OPTIONAL EXTRAS: L.M.I. (Electronic Load Moment Indicator), manual boom extension, man bucket, remote control, canvas cab, metal enclosed cab, carry deck, battery, battery charger, hydraulic winch, hydraulic chain hoist, non-marking tires.

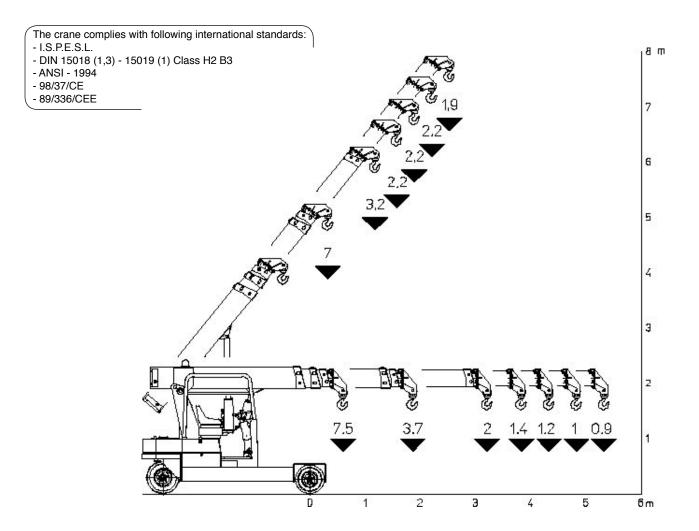

VALLA MODEL 75 E

