

SKYLIFT

MINI-DERRICK 33 PLUS/TD



Ph. 440-960-2100
Fax 440-960-2104
www.skyliftus.com



Mini-Derrick 33 Plus with Track Drive






- FITS THRU GATES! - 32" WIDE
- 42 FOOT REACH
- INSULATED BOOM
- 4,000 POUND CAPACITY
- PATENTED HYDRAULIC JIB
- PIN-ON BUCKET
- RADIO CONTROLS
- WHEEL OR TRACK DRIVE
- DIESEL POWER
- SETS 55 FOOT POLES
- HYDRAULIC POLE GUIDES
- TRAILER SOLD SEPARATELY



MINI-DERRICK 33 PLUS/TO TECHNICAL SPECIFICATIONS

| | |
|-------------------------------|---|
| BASE | High Strength Steel Construction |
| TRACK | Hydraulic Extension, Rubber Construction |
| WEIGHT | 7,700 lbs |
| WIDTH | 35 in. Closed/ 52 in. Open |
| HEIGHT | 78 in. |
| LENGTH | 13 ft. 4 in |
| SHEAVE HEIGHT | 42 ft. |
| BOOM | 3 Section all Hydraulic Extension |
| BOOM ANGLES | -10 Degrees to +80 Degrees |
| WORK ZONE | Restricted |
| INSULATION | 46 KV cat. C/ Fiberglass Boom |
| CAPACITY | 4000 lbs at 6 ft. |
| ENGINE | 23 HP Kubota Diesel |
| DRIVE | 2 Speed Planetary Reduction |
| FUEL TANK | 9 gallons |
| HYDRAULIC TANK | H11 gallons |
| MAX OPERATING PRESSURE | 2750 PSI |
| GROUND PRESSURE | 4.4 PSI |
| WINCH | Planetary 3500 lbs. Capacity/Plasma Rope |
| AUGER | 3,000 ft. lbs |

MINI-DERRICK 33 PLUS

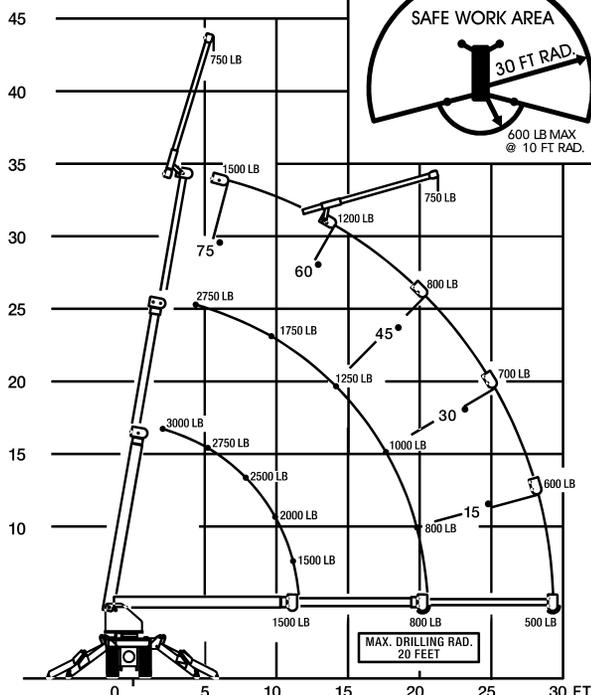

OPTIONAL EQUIPMENT

- RADIO REMOTE FOR BOTH DRIVE AND BOOM CONTROLS
- HYDRAULIC POLE GUIDE
- HYDRAULIC JIB / 8 FT. ADDITIONAL BOOM
- SINGLE MAN BASKET WITH BRAKE
- TWO SINGLE MAN BASKETS
- 110 VOLT 1500 WATT INVERTER WITH OUTLETS
- NON-MARKING RUBBER TRACKS
- TRAILER / 12,000 LB GVW TANDEM AXLE

Call for Special Requests!



3000 Leavitt Rd. Lorain, Ohio 44052
Ph.440-960-2100 Fax 440-960-2104